


// 12 MIL SILVERBACK™ HS

(HIGH STRENGTH)



VAPOR BARRIER

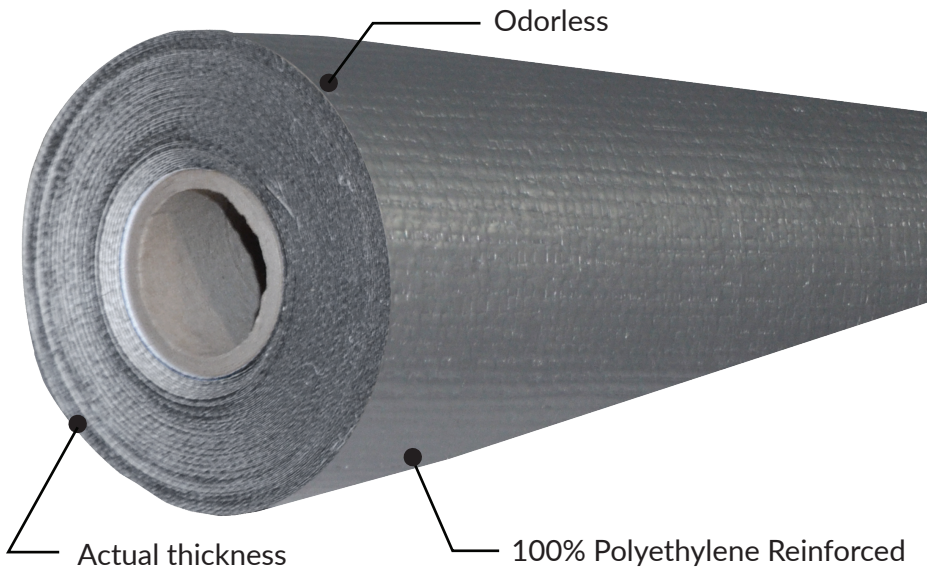

- ▶ Made from 100% virgin polyethylene
- ▶ 100% reinforced by strengthened PE
- ▶ No welded seams/one piece
- ▶ Installs easily
- ▶ No odor or off-gassing
- ▶ Out-performs string reinforced puncture and tear tests
- ▶ Bright white face/silver back

Available in:

- 46" x 85' - 325sqft • 93" x 85' - 660sqft • 12' x 85' - 1020sqft

PROPERTIES	AVERAGE VALUES
APPEARANCE	Silver/White
THICKNESS (measured at plastic)	14 Mil
WEIGHT	54 lbs/msf 7.8 oz/yd ² 264 gsm
CONSTRUCTION	Single Film Laminate
**GRAB TENSILE	N/A
**ELONGATION AT SCRIM BREAK	N/A
*TRAPEZOID TEAR	N/A
CBR PUNCTURE RESISTANCE	508 lbf
PERM RATING	0.031 perms/(ft ² •hr•in•Hg)
WVTR	.215 grains (ft ² •hr)
MAXIMUM STATIC USE TEMPERATURE	N/A
MINIMUM STATIC USE TEMPERATURE	N/A

*Tests are an average of diagonal directions. **Tests are an average of machine and transverse directions.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. SILVERBACK™ MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.